



MODEL: BUR/6124-SGL-XX-TOP-10  
 MODEL: BUR/6604-SGL-XX-TOP-10  
 WHERE "XX" DESIGNATES THE NUMBER OF VALVE STATIONS

REVISION CHANGE			
REV	CN #	DESCRIPTION	DATE
X1	N/A	DRAWN	05 JUN 00


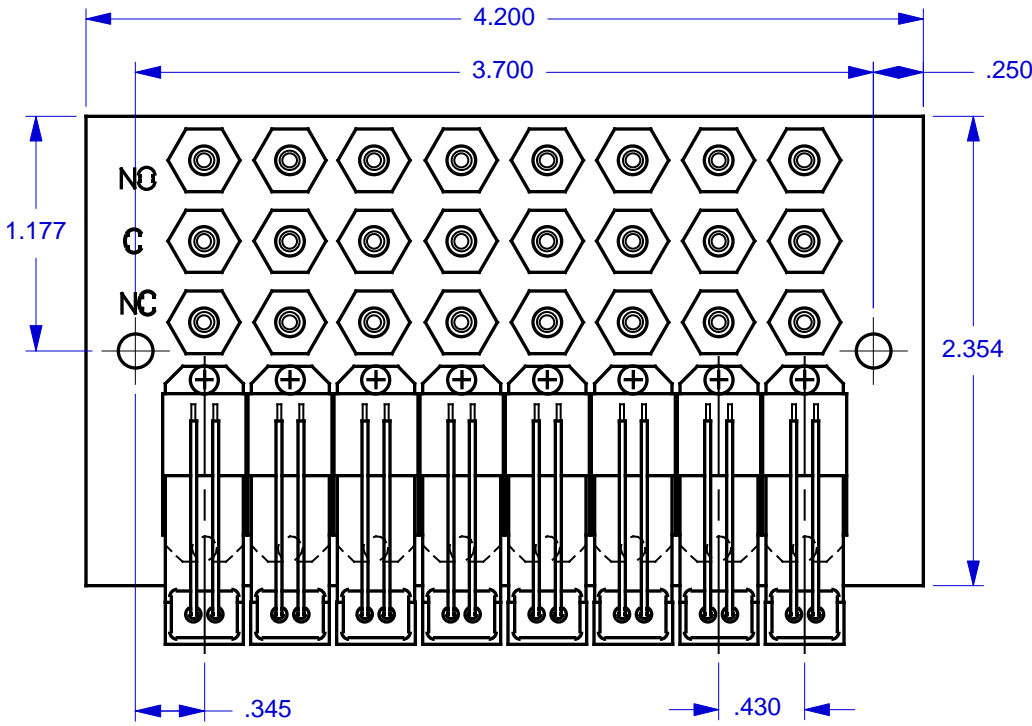


MODEL FEATURES:

- ACCOMMODATES BÜRKERT™ 6124 & 6604 TYPE VALVES (3-WAY LIQUID VALVES).
- SPECIFY FROM 2 TO 16 VALVES. ADD OR SUBTRACT .430" OF MANIFOLD LENGTH PER VALVE.
- TOP PORTED FOR EASY ACCESS AND MINIMUM REQUIRED SPACE.
- VALVES ARE MOUNTED VIA EXCLUSIVE 'NO-STRESS' BONDED-IN BRASS INSERTS.
- INTERNAL CHANNELS ARE .047" WIDE x .047" DEEP, BRILLIANTLY POLISHED AND WITHSTAND PRESSURE OVER 125 P.S.I.

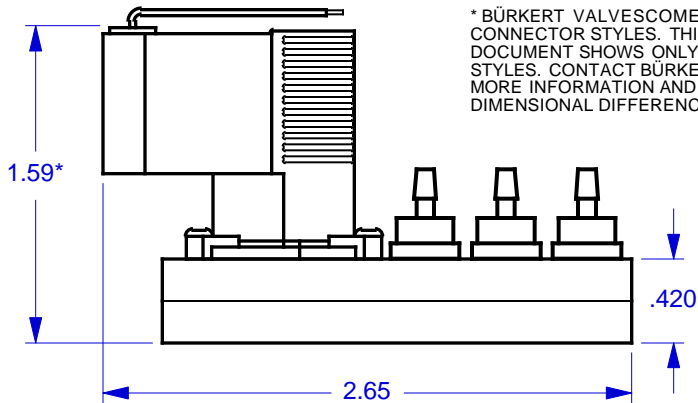

\* BÜRKERT VALVES COME IN OTHER CONNECTOR STYLES. THIS DOCUMENT SHOWS ONLY TWO STYLES. CONTACT BÜRKERT FOR MORE INFORMATION AND DIMENSIONAL DIFFERENCES.

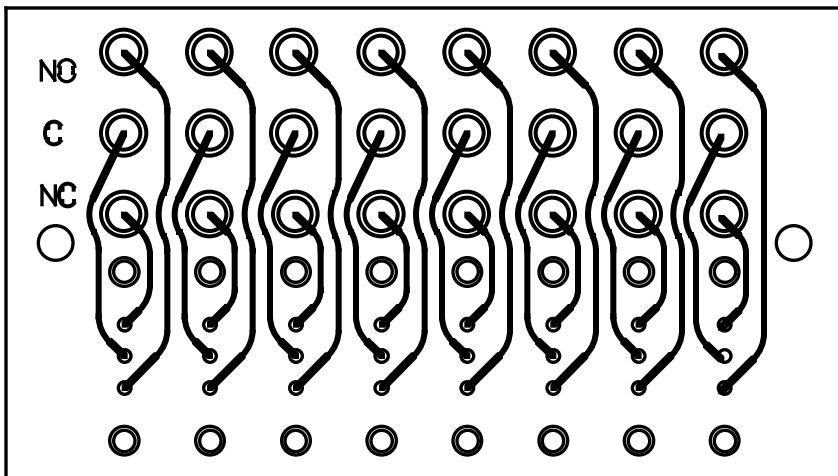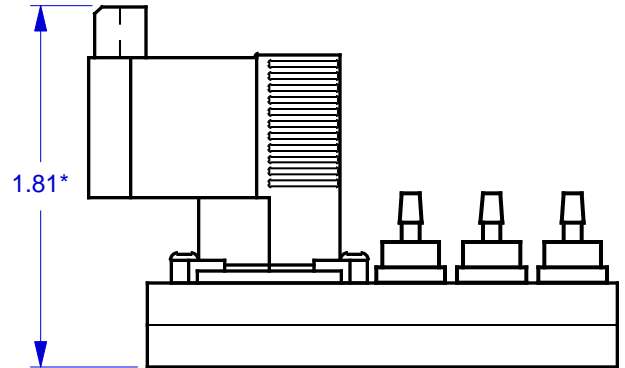

NOTES:

1. MANIFOLDS ARE SUPPLIED WITHOUT ANY HARDWARE OR VALVES. THE COMPONENTS SHOWN ARE FOR ILLUSTRATION PURPOSES ONLY.
2. ALL PORTS ARE THREADED #10-32 UNF - 2B. M5.0 THREADS ARE AVAILABLE ON SPECIAL REQUEST.
3. MOUNTING HOLES ARE .156 DIAMETER FOR #6 SCREWS. USE OF .375 DIAMETER X .040 THICK (MIN) NYLON WASHERS UNDER THE MOUNTING SCREW HEADS ARE HIGHLY RECOMMENDED.
4. MANIFOLD MATERIAL IS POLISHED ACRYLIC. CLEAR (BLuish TINT) P.V.C. IS ALSO AVAILABLE ON SPECIAL ORDER AT INCREASED PRICE.
5. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

**MicroAdvances**  
 6073 N.W. 167th STREET, BLDG. C-21  
 MIAMI, FL. USA 33015 • (305) 556-4801

NAME: BUR/6104-DBL-16-TOP-10  
 PART/DWG NO: 600285 REV: A  
 ASSEMBLY: N/A  
 DWN BY: J.W. DATE: 05 JUN 00  
 DESIGNED BY: XX  
 REF: **BUR/6124, 6604**

BÜRKERT CRONTROMATIC USA, Irvine, CA 92614

SCALE: 1 : 1 @ 7.9 X 13.3 SHEET: 1 OF 1